



MODEL NO.:EFC-1/2GV1
 Size:3/8"~ 2" (DN10 ~ DN50)



API 602 FORGED STEEL GATE VALVE

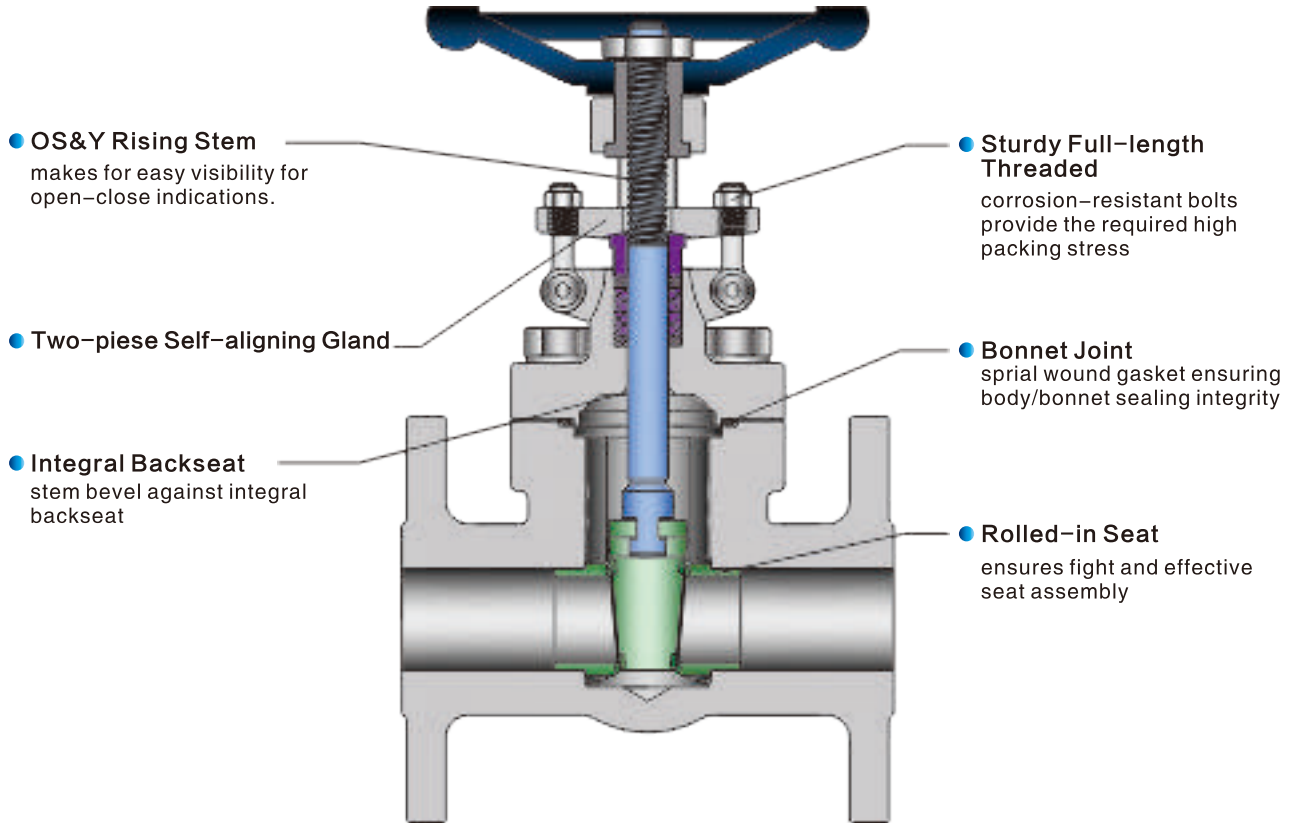


SPECIFICATION


Design & MFG.	API 602	End Threads	ASME B1.20.1
Press-Temp Rat.	ASME B16.34	Socket-Weld	ASME B16.11
End Flange	ASME B16.5	Test	API 598

OPTIONAL DESIGN FEATURES


1.Live-Loading




2.Welded Bonnet



3.Grease injector & lantern ring




4.Integrally Extended Body

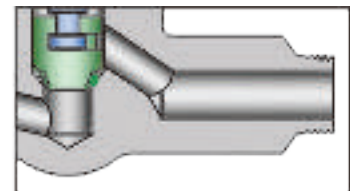


The material is according to ASTM Standard
 Model Denote:EFC=Elite Flow Control | 1/2=Size in inch | GV=GATE Valve | 1=150Lb


API 602 FORGED STEEL GATE VALVE

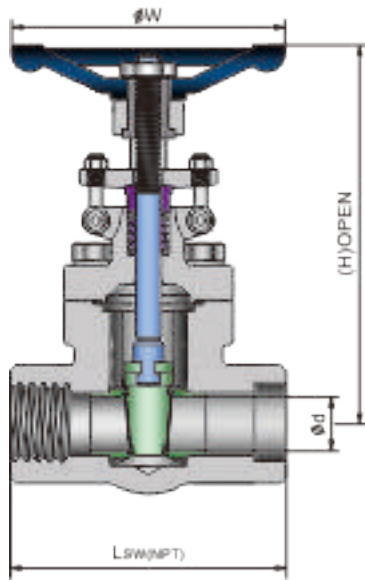

SW(NPT)BOLTED BONNET
800,1500LB

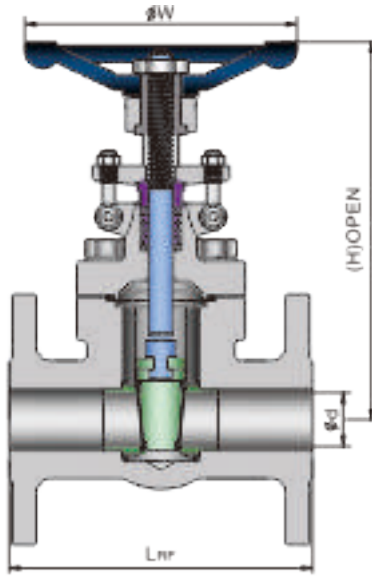

FLANGED BOLTED BONNET
150 ~ 1500LB

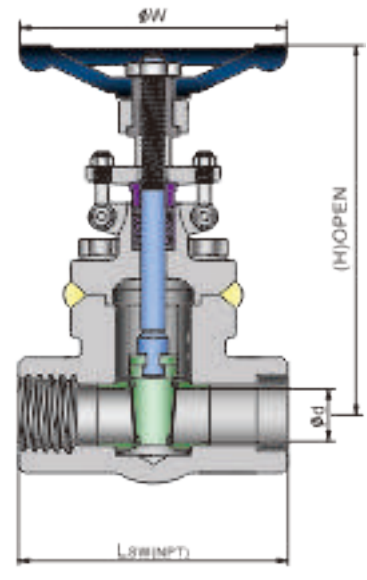

SW(NPT)WELDED BONNET
800,1500LB

Material List

PART	STANDARD MATERIALS					
BODY	ASTM A105	ASTM A350 LF2	ASTM A182 F304(L)	ASTM A182 F316(L)	ASTM A182 F51/F53	ASTM A182 F11/F22
SEAT	ASTM A182 F6a	ASTM A182 F6a	ASTM A182 F304(L)	ASTM A182 F316(L)	ASTM A182 F51/F53	ASTM A182 F6a
WEDGE	ASTM A182 F6a	ASTM A182 F6a	ASTM A182 F304(L)	ASTM A182 F316(L)	ASTM A182 F51/F53	ASTM A182 F6a
STEM	ASTM A182 F6a	ASTM A182 F6a	ASTM A182 F304(L)	ASTM A182 F316(L)	ASTM A182 F51/F53	ASTM A182 F6a
GASKET	SS+FLEXIBLE GRAPHITE					
BONNET	ASTM A105	ASTM A350 LF2	ASTM A182 F304(L)	ASTM A182 F316(L)	ASTM A182 F51/F53	ASTM A182 F11/F22
BOLT	ASTM A193 B7	ASTM A320 L7	ASTM A193 B8(M)	ASTM A193 B8(M)	ASTM A193 B8M	ASTM A193 B16
PACKING	FLEXIBLE GRAPHITE					
GLAND	ASTM A276 410	ASTM A276 410	ASTM A276 304	ASTM A276 316	ASTM A276 316	ASTM A276 410
GLAND FLANGE	ASTM A105	ASTM A350 LF2	ASTM A182 F304	ASTM A182 F304	ASTM A182 F304	ASTM A105
EYEBOLT	ASTM A193 B7	ASTM A320 L7	ASTM A193 B8(M)	ASTM A193 B8(M)	ASTM A193 B8M	ASTM A193 B16
NUT	ASTM A194 2H	ASTM A194 7	ASTM A194 8(M)	ASTM A194 8(M)	ASTM A194 8M	ASTM A194 4
STEM NUT	ASTM A276 420	ASTM A276 420	ASTM A276 420	ASTM A276 420	ASTM A276 420	ASTM A276 420
HANDWHEEL	ASTM A197					

The material is according to ASTM Standard
 Model Denote:EFC=Elite Flow Control | 1/2=Size in inch | GV=GATE Valve | 1=150Lb

MODEL NO.:EFC-1/2GV1
Size:3/8" ~ 2"(DN10 ~ DN50)



API 602 FORGED STEEL GATE VALVE

800LB SW(NPT), Bolted Bonnet or Welded Bonnet

Nominal Diameter	Standard Port	mm(in)	15(1/2)	20(3/4)	25(1)	32(1 1/4)	40(1 1/2)	50(2)	65(2 1/2)
	Full Port	mm(in)	10(3/8)	15(1/2)	20(3/4)	25(1)	32(1 1/4)	40(1 1/2)	50(2)
∅d (Flow Passway)		mm	10	13	18	23	28	36	44
LSW(NPT)(Face to Face)		mm	79	92	111	120	120	140	178
H(Open Height)		mm	166	169	193	230	246	283	334
∅W(Handwheel)		mm	100	100	125	160	160	180	220
WEIGHT		kg	2.2	2.5	4.6	5.9	7.9	11.1	14.1

1500LB SW(NPT), Bolted Bonnet or Welded Bonnet

Nominal Diameter	Standard Port	mm(in)	15(1/2)	20(3/4)	25(1)	32(1 1/4)	40(1 1/2)	50(2)
	Full Port	mm(in)	10(3/8)	15(1/2)	20(3/4)	25(1)	32(1 1/4)	40(1 1/2)
∅d (Flow Passway)		mm	10	13	18	23	28	36
LSW(NPT)(Face to Face)		mm	92	111	120	120	140	178
H(Open Height)		mm	169	193	230	246	283	334
∅W(Handwheel)		mm	100	125	160	160	180	220
WEIGHT		kg	3.5	4.6	5.9	7.9	11.1	14.1

150~600LB RF, Standard port, Bolted Bonnet or Welded Bonnet

Nominal Diameter		mm(in)	15(1/2)	20(3/4)	25(1)	32(1 1/4)	40(1 1/2)	50(2)
∅d (Flow Passway)		mm	10	13	18	23	28	36
LRF (Face to Face)	150LB	mm	108	117	127	140	165	178
	300LB	mm	140	152	165	178	190	216
	600LB	mm	165	190	216	229	241	292
H(Open Height)	150 ~ 600LB	mm	166	169	193	230	246	283
∅W(Handwheel)		mm	100	100	125	160	160	180

900~1500LB RTJ, Standard port, Bolted Bonnet or Welded Bonnet

Nominal Diameter		mm(in)	15(1/2)	20(3/4)	25(1)	32(1 1/4)	40(1 1/2)	50(2)
∅d (Flow Passway)		mm	10	13	18	23	28	36
LRTJ (Face to Face)	900LB	mm	216	229	254	279	305	371
	1500LB	mm	216	229	254	279	305	371
H(Open Height)	900 ~ 1500LB	mm	169	193	230	246	283	334
∅W(Handwheel)		mm	100	125	160	160	180	220

Weight:150~1500LB Flange End, Standard port, Bolted Bonnet

CLASS	SIZE	15(1/2)	20(3/4)	25(1)	32(1 1/4)	40(1 1/2)	50(2)
	150LB	3.5	4.2	7.6	8.9	11.9	16.3
	300LB	3.9	4.9	8.4	11.1	13.6	18.5
	600LB	4.4	5.5	9.2	11.3	15.6	21.4
	900LB	8.4	11.5	14.3	16.5	22.8	35.8
	1500LB	8.4	11.5	14.3	16.5	22.8	35.8

The material is according to ASTM Standard

Model Denote:EFC=Elite Flow Control | 1/2=Size in inch | GV=GATE Valve | 1=150Lb